

# MS 900

## Effortless & simple tire changing



- 30" automatic LEVERLESS tire changer
- Easy and precise locking system
- 2 laser pointers
- Unique tooling system
- Inverter solution
- Completely electromechanic
- Intuitive control panel
- Side lift

# MS 900

## Automatic Leverless Tire Changer

The new MS 900 is a 30" automatic leverless tire changer which guarantees a fast and effortless tire changing.

Intuitive with high level of technology, this equipment makes the job simple as you've never experienced. The machine recognizes the dimension of the wheel by placing two laser pointers.

Completely electromechanic, all movements are driven by motor inverters to guarantee precision and reliability.


**WDK approved\***  
Certified for RunFlat  
and UHP-tyres



# Easy and effortless

## Center post clamping system

- Easy and precise locking system
- Completely mechanical and easy maintainability
- Faster than any other automatic locking system
- Color code to identify the locking stage

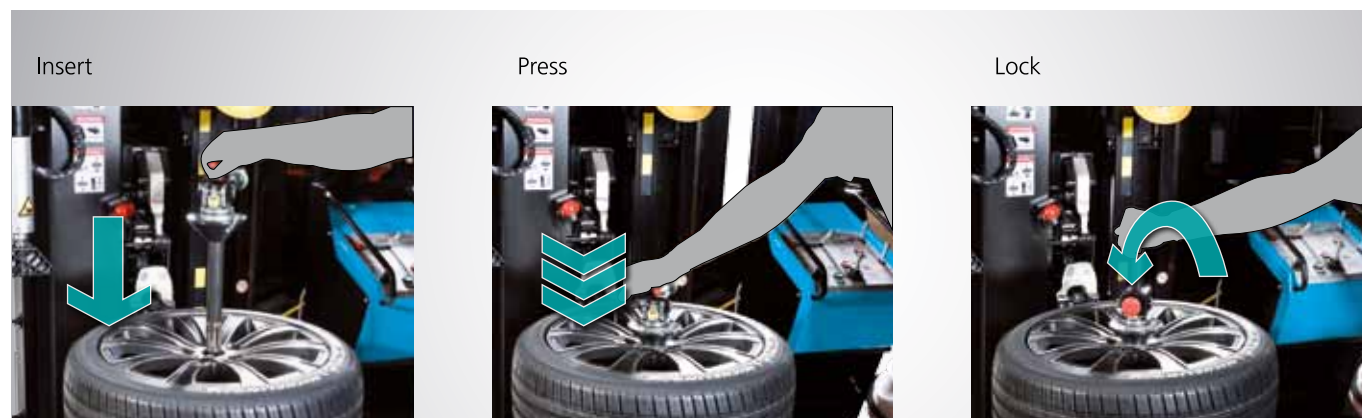

## Wheel set up through two laser pointers

- Intuitive color code system
- 2 independent set up buttons:
  - Green one to set wheel diameter
  - Red one to set the wheel width



## Bead Breaker Disks

- Double arm bead breaker system
- The strongest. Market benchmark
- Inverter technology
- Hump shape pre-set
- Folding structure to save the wheel





# User oriented design

## Side lift

- Lifting capacity up to 80 kg
- Allows to work always in an ergonomic position without stressing the back
- Improves productivity



## Control panel

Maximum user comfort in a single workstation which includes:

### Inflating control box

- Pressure gauge
- Air supply and oiler
- Inflating hose

### Control console

Joysticks, buttons and switches in an intuitive layout that follows the tire changing procedure

### Pedals

- To control the rotation (motorinverter) and the inflating process



# Performance details

## Tooling system

Keep your tire and wheel safe.

Leverless tire-bead extraction tool



Drive-in lower tire-bead tool



Assembly upper tire-bead tool



## Bead pressing arm

- It supports the tire mounting
- It moves automatically in sleep mode



## Led bar & mirror:

- For a better view on the operation of the lower bead



# Technical data

Technical specification	MS 900
Power supply	230 V 1ph 50 – 60 Hz
Air supply pressure	8 – 10 Bar
Rim diameter clamping	12" – 30"
Max. Wheel diameter	1,200 mm (47")
Wheel width	up to 16"
N. turntable speed	2 speed
Rotation speed	7 – 16 rpm
Bead breaking force	14,406 N
Bead breaking range	670 mm (26")
Lift capacity	80 Kg
Unit weight	600 Kg
Unit dimensions (WxDxH)	1.880 x 1.850 x 1.750 mm

## Scope of delivery

- 1 x MS 900
- 2 x Centre locking protection
- 2 x Cones protection
- 2 x locking system pin protection
- 1 x Cone Ø70 mm
- 1 x Bead locking plier
- 3 x Rim protection kit
- 3 x Mounting tools protection
- 1 x Flange reduction
- 1 x Weight scraper
- 1 x Brush
- 1 x Grease pot holder

# Accessory

PN: 1 695 108 137



Blast inflating system

PN: 1 695 107 439



Wheel clamping adaptor kit for reverse mounted wheels

PN: 1 695 107 440



Light truck cone Ø 75 – 145 mm

PN: 1 695 107 441



Cone Ø 75 – 120 mm for steel rims

PN: 1 695 107 442



Light truck cone Ø 190 – 223 mm + spacer

PN: 1 695 103 302



Bead locking plier

PN: 1 695 107 444



Centre locking protection

PN: 1 695 000 289



Cone Ø 70 mm

PN: 1 695 108 136



Light truck cone Ø 110 – 190 mm + spacer

PN: 1 695 108 138



Cone Lamborghini

PN: 1 695 108 139



Cone Porsche

PN: 1 695 108 140



Cone BMW

PN: 1 695 108 196



Wheel clamping adaptor kit for clad wheels

PN: 1 695 108 195



Light truck kit: cones Ø120-190 mm / Ø190-223 mm + spacer

Beissbarth GmbH  
A Bosch Group company  
Hanauer Straße 101  
80993 München  
Germany

Tel. +49-89-149 01-0  
Fax +49-89-149 01-240

[www.beissbarth.com](http://www.beissbarth.com)  
[sales@beissbarth.com](mailto:sales@beissbarth.com)

